

## HandyPlasma® 125 Cutting Package

- Plugs into standard 115 V outlet
- Portable—weighs just 60 lbs. (27.2 kg)—carry it anywhere
- Cutting capability on carbon steel up to 1/8 in. (3.18 mm) thick
- Built-in air supply
- Equipped with patented, repairable PT-34 torch with double ended electrode for reduced operating costs
- Spare parts kit
- One year warranty on console and torch
- Fixed output makes it easy to use
- Over temperature light



## Specifications

Cuts .....	1/8 in. (3.18 mm)
Output.....	11 amps @ 30% duty cycle
Input Voltage.....	115 V, 60 Hz, 1 Phase
Input Current @ rated load.....	.20 A @ 115 V
Output Rating current range.....	11 amps - 100 volts
Open Circuit Voltage.....	290 V DC max.

### Dimensions: HandyPlasma® 125

8.63 in. (219mm) wide x 11.08 in. (282mm) high x 18 in. (457mm) deep	
Weight .....	60 lbs. (27 kg)

### PT-34 Torch

Shipping Wt.....	2 lbs. (1 kg)
Length of Service Lines.....	15-ft. (4.5 m)

### Equipment Supplied with Packages 37884 and 37885

PT-34, 75° Torch w/ 15-ft. (4.5 m) lines.....	37886
Torch Start Up-Kit.....	37918

## How To Order

The HandyPlasma®125 package includes everything you need for Plasmarc cutting: power console, PT-34 torch, built-in air compressor, torch spare parts kit, work cable, and input power cable.

## Ordering Information


HandyPlasma® Package, 115V, 60Hz.....	37884
HandyPlasma® Package, 230V, 50Hz.....	37885

Instruction Literature, order number ..... **F-15-568**  
 Sales Literature, order number ..... **PAC-21050**

## Optional Accessories

### Optional Torch Spare Parts Kit P/N 37918 Contains:

- 2- Heat Shields, P/N 20282XL
- 4- Nozzle Tips, P/N 37887
- 1- O-Ring Lube P/N 17672
- 2- Electrodes, P/N 37888
- 1- Swirl Baffle, P/N 18785

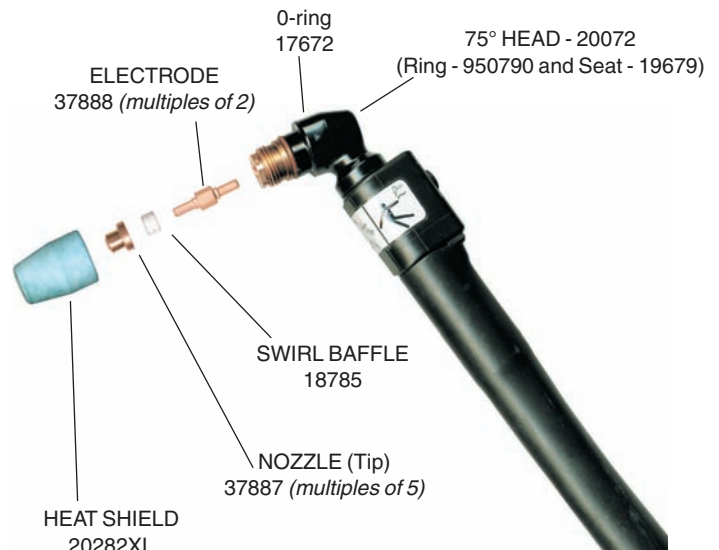

**Torch Guide Kit**—This complete kit, in a rugged plastic carrying case, includes attachments for circle and straight line cutting on ferrous and nonferrous metals.

- Torch Guide Kit
- Deluxe: 1-3/4 in. (44.5 mm) - 42 in. (106 cm) Radius .....0558003258
- Torch Guide
- Basic: 1-3/4 in. (44.5 mm) - 28 in. (71 cm) Radius....0558002675

See Plasmarc Accessories Section for more details.